

DS-2CE56D0T-IT3E(C) 2 MP PoC Fixed Turret Camera



- 2 MP PoC turret camera
- 2.8 mm and 3.6 mm fixed focal lens
- Up to 40 m IR distance for bright night imaging
- Water and dust resistant (IP67)
- Transmits both HD video and power over the same coaxial cable

▪ Specification


Camera	
Image Sensor	2 MP CMOS
Signal System	PAL/NTSC
Resolution	1920 (H) × 1080 (V)
Frame Rate	PAL: 1080p @ 25 fps NTSC: 1080p @ 30 fps
Min. Illumination	0.01 Lux @(F2.0, AGC ON), 0 Lux with IR
Day & Night	ICR
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Lens	Fixed focal lens, 2.8 mm and 3.6 mm optional
Field of View	2.8 mm, horizontal FOV: 101°, vertical FOV: 56°, diagonal FOV: 118° 3.6 mm, horizontal FOV: 78°, vertical FOV: 42°, diagonal FOV: 92°
Lens Mount	M12
WDR (Wide Dynamic Range)	Digital WDR
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 75°, Rotation: 0 to 360°
Image	
Day/Night Mode	Auto/Color/BW (Black and White)
Image Mode	STD/HIGH-SAT
AGC	Yes
White Balance	Auto/Manual
AE (Auto Exposure) Mode	DWDR, BLC, HLC, Global
Noise Reduction	2D DNR
Language	English
Function	Brightness, Smart IR, Sharpness
Interface	
Video Output	1 HD analog output
General	
Power	12 VDC ± 25%, 0.24 A, max. 2.9 W, PoC.af, *You are recommended to use one power adapter to supply the power for one camera.
IR Range	Up to 40 m
Operating Conditions	-40°C to 60°C (-40°F to 140°F). Humidity: 90% or less (non-condensing)
Protection Level	IP67
Material	Main body: Metal, Enclosure: Plastic
Communication	HIKVISION-C
Dimension	∅109.8 mm × 91 mm (∅4.32" × 3.58")
Weight	Approx. 310 g (0.68 lb.)

▪ Available Model

DS-2CE56D0T-IT3E(2.8mm)(C)

DS-2CE56D0T-IT3E(3.6mm)(C)

▪ Dimension

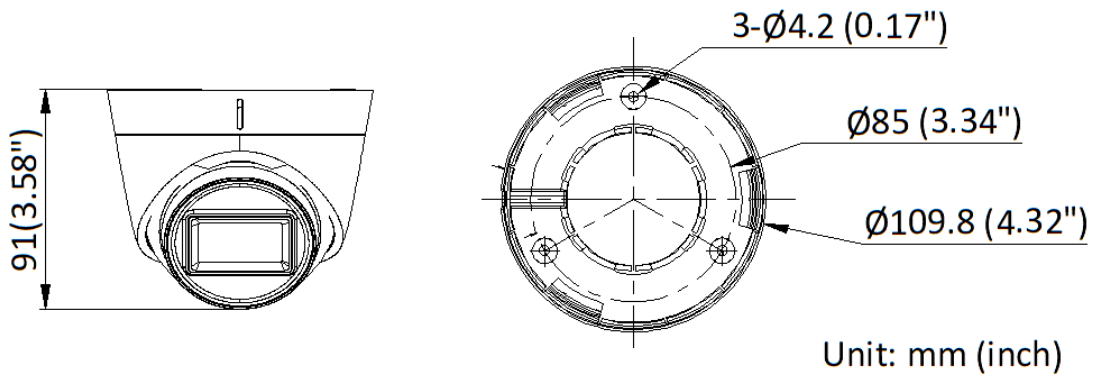

▪ **Accessory**

▪ **Optional**

DS-1272ZJ-110-TRS Wall Mount	DS-1275ZJ-SUS Vertical Pole Mount	DS-1276ZJ-SUS Corner Mount	DS-1280ZJ-S Junction Box	DS-1281ZJ-S Inclined Ceiling Mount
				
				
DS-1280ZJ-TR13				



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

