

# DH-XVR5216A-I3/T

16CH Penta-brid 5MP Value/1080P 1U 2HDDs WizSense Digital Video Recorder



WizSense

Launched by Dahua Technology, WizSense is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on Dahua's advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

## Series Overview

The XVR5000-I3/T Series offers powerful recorders that work in conjunction with 1080p HDCVI cameras, delivering smooth and crisp live videos along with an array of advanced security functions. It features two-way talk over coaxial cable, and incorporates AcuPick technology, along with other AI functions, to enhance intelligence and convenience in the surveillance field.

## Functions

### Two-way talk

Allows for seamless communication between the camera, client and recorder over coaxial cable, and offers instant voice intercom and timely audio alerts.

### Enhanced Encoding

Encoding Enhancement mode optimizes videos through real-time encoding to make them smoother and improve scene rendering.

### Face Recognition

Dahua Face Recognition technology extracts the features of captured faces and compares them with that in face database.

\*Face Recognition takes effect when Face is selected in AI Mode.

\* *Dolynk cloud version: DMSS 2.0.30 and above, Dolynk Care 2.50.20 and above.*

- 16-channel two-way talk over coaxial cable allows for seamless communication between the camera, client and recorder.
- 2-channel AcuPick for analog channels which improves the efficiency of target retrieval.
- 4-channel perimeter protection for analog channels which supports tripwire and intrusion detection powered by AI.
- 2-channel face recognition for analog channels which supports face comparison.
- 16-channel SMD Plus for analog channels or 24-channel SMD by camera which allows the device to trigger accurate alarms for humans and vehicles.
- 16-channel AI Coding saves on storage and bandwidth while maintaining the details of targets in videos.
- Supports HDCVI, AHD, TVI, CVBS and IP video input.
- Supports up to 24-channel IP camera input and each channel can be up to 6 MP. The incoming bandwidth reaches 128 Mbps.
- Supports accessing Wi-Fi cameras, making it suitable for a wide range of scenes.
- Smart H.265+ and H.265 dual-stream video compression.



### Perimeter Protection

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improves alarm accuracy.

\*Perimeter Protection takes effect when IVS is selected in AI Mode.

### AcuPick

This industry-leading search technology effectively utilizes back-end intelligence to help with searching through massive video data to quickly and conveniently locate targets with greater precision.

\*AcuPick takes effect when AcuPick is selected in AI Mode.

### SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

\*SMD Plus takes effect when SMD is selected in AI Mode.

## Technical Specification

### System

|                     |                            |
|---------------------|----------------------------|
| Main Processor      | Industrial-grade processor |
| Operating System    | Embedded Linux             |
| Operating Interface | Web; Local GUI             |

### AcuPick

|                                                                    |            |
|--------------------------------------------------------------------|------------|
| AcuPick Performance of AI by Recorder (1080P) (Number of Channels) | 2 channels |
|--------------------------------------------------------------------|------------|

### Perimeter Protection

|                                                           |                                           |
|-----------------------------------------------------------|-------------------------------------------|
| Perimeter Performance AI by Recorder (Number of Channels) | 4 channels, 10 IVS rules for each channel |
|-----------------------------------------------------------|-------------------------------------------|

### Face Detection

|                                                                   |                                                  |
|-------------------------------------------------------------------|--------------------------------------------------|
| Face Attributes                                                   | 6 attributes                                     |
| Face Detection Performance of AI by Recorder (Number of Channels) | 2 channels (up to 12 face images/s each channel) |

### Face Recognition

|                                                                     |                                             |
|---------------------------------------------------------------------|---------------------------------------------|
| Face Database Capacity                                              | Up to 10 face databases with 10,000 images. |
| Face Recognition Performance of AI by Recorder (Number of Channels) | 2 channels                                  |

### SMD

|                      |                                                                                                                                    |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------|
| SMD Plus by Recorder | 16 channels: Secondary filtering for human and vehicle, reducing false alarms caused by leaves, rain and lighting condition change |
| SMD by Camera        | 24 channels                                                                                                                        |

### AI Video Quality Analytics

|                                        |                                                                                                                         |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| AI Video Quality Analytics by Recorder | 16 channels: Supports detecting brightness levels, color cast, defocus, overexposure, contrast levels, black and white. |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------|

### Scene Changing

|                            |           |
|----------------------------|-----------|
| Scene Changing by Recorder | 1 channel |
|----------------------------|-----------|

### Irregular Black Block Masking

|                                           |           |
|-------------------------------------------|-----------|
| Irregular Black Block Masking by Recorder | 1 channel |
|-------------------------------------------|-----------|

### Audio and Video

|                     |                                                                                                                                                                                                                                                                                                                 |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Analog Camera Input | 16 BNC ports, supports HDCVI/AHD/TVI/CVBS auto-detect                                                                                                                                                                                                                                                           |
| Camera Input        | 1. CVI: 5 MP@25 fps; 5 MP@20 fps; 5 MP@10/12.5 fps; 4 MP@25/30 fps; 1080p@25/30 fps; 720p@50/60 fps; 720p@25/30fps.<br>2. TVI: 5 MP(2560 × 1944)@20 fps; 5 MP(2960 × 1665)@20/25 fps; 4 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps.<br>3. AHD: 5 MP@20 fps; 4 MP@25/30 fps; 1080p@25/30 fps; 720p@25/30 fps. |

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IP Camera Input           | Up to 24 channels of IPC access<br>8 IP channels by default + 16 channels (analog channels are converted to IP channels)<br>Incoming bandwidth: 128 Mbps, recording bandwidth: 128 Mbps<br>*After IP extension is enabled, Video Quality Analytics, Scene Changing, Face Recognition, Face Detection, Perimeter Protection and AcuPick cannot be used.                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Encoding Capacity         | Encode Enhancement disabled :<br>Main stream:<br>Channels 1-4 5M-N@(1 fps–25 fps), others 5M-N@(1 fps–12 fps);<br>Channels 1-4 4M-N/1080p@(1 fps–30 fps), others 4M-N/1080p@(1 fps–15 fps);<br>1080N/720p/960H/D1/CIF@(1 fps–30 fps);<br>Sub stream: D1/CIF@(1 fps–15 fps);<br>Encode Enhancement enabled :<br>Main stream:<br>Channels 1-8 5M-N@(1 fps–20 fps), others 5M-N@(1 fps–12 fps); (4 channels can be transformed to 5MP@6 fps)<br>Channels 1-8 4M-N/1080p@(1 fps–25 fps), others 4M-N/1080p@(1 fps–15 fps);<br>1080N/720p/960H/D1/CIF@(1 fps–30 fps);<br>Sub stream: D1/CIF@(1 fps–15 fps);<br>*When Encode Enhancement is enabled, Video Quality Analytics, Scene Changing, Face Recognition, Face Detection, Perimeter Protection and AcuPick cannot be used. |
| Dual-stream               | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Video Bit Rate            | 32 kbps–6144 kbps                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Audio Sampling            | 8 kHz, 16 bit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Audio Bit Rate            | 64 kbps                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Video Output              | 1 HDMI, 1 VGA<br>HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720<br>VGA: 1920 × 1080, 1280 × 1024, 1280 × 720<br>It changes to 1920 × 1080, 1280 × 1024, 1280 × 720 when Face, IVS&SMD or AcuPick is selected in AI Mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Multi-screen Display      | When IP extension mode not enabled: 1/4/8/9/16<br>When IP extension mode enabled: 1/4/8/9/16/25                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Third-party Camera Access | Panasonic; Sony; Hanwha; Axis; Arecont; ONVIF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

### Compression Standard

|                   |                                                     |
|-------------------|-----------------------------------------------------|
| Video Compression | AI Coding; Smart H.265+; H.265; Smart H.264+; H.264 |
| Audio Compression | G.711a; G.711u; PCM                                 |

### Network

|                     |                                                                                                                                                                                          |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network Protocol    | HTTP; HTTPS; TCP/IP; IPv4; IPv6; RTSP; UDP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; FTP; DDNS; SNMP; Alarm Server; P2P; Auto Registration; IP Search (Supports IP camera, DVR, NVS, etc.) |
| Mobile Phone Access | iOS; Android                                                                                                                                                                             |
| Interoperability    | ONVIF 24.12 (Profile T; Profile S; Profile G); CGI; SDK                                                                                                                                  |
| Browser             | Chrome; IE; Safari; Edge; Firefox                                                                                                                                                        |

### Recording Playback

|                    |                                                                                               |
|--------------------|-----------------------------------------------------------------------------------------------|
| Record Mode        | General; alarm; motion detection; intelligent                                                 |
| Recording Playback | 1/4/9/16<br>It changes to 1/4/9 split when Face or IVS&SMD or AcuPick is selected in AI Mode. |

|               |                                                                                  |
|---------------|----------------------------------------------------------------------------------|
| Backup Method | USB device and network                                                           |
| Playback Mode | Instant playback; general playback; event playback; tag playback; smart playback |

## Storage

|            |     |
|------------|-----|
| Disk Group | Yes |
|------------|-----|

## Alarm

|                   |                                                                                                                                                        |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| General Alarm     | Motion detection; local alarm; alarm box; HDCVI alarm; camera external alarm; network alarm; PIR alarm                                                 |
| Anomaly Alarm     | Error (no disk; disk error; low space; low quota space; network disconnection; IP conflict; MAC conflict); video loss; video tampering; camera offline |
| Intelligent Alarm | Face detection; face recognition; perimeter protection; SMD Plus                                                                                       |
| Alarm Linkage     | Record; snapshot (panoramic); local alarm output; IPC external alarm output; audio; buzzer; log; preset; email                                         |

## Ports

|                |                                                                                                                                 |
|----------------|---------------------------------------------------------------------------------------------------------------------------------|
| Audio Input    | 4-channel RCA<br>16-channel BNC (Coaxial Audio)                                                                                 |
| Audio Output   | 1-channel RCA                                                                                                                   |
| Two-way Talk   | Coaxial two-way talk: 16-channel BNC<br>Local and network user two-way talk: Shares the same audio input with the first channel |
| Alarm Input    | 16 channels                                                                                                                     |
| Alarm Output   | 3 channels                                                                                                                      |
| Disk Interface | 2 SATA ports. Each disk can contain up to 16 TB. This limit varies depending on the environment temperature.                    |
| RS-485         | 1                                                                                                                               |
| USB            | 2 (1 front USB 2.0 port, 1 rear USB 3.0 port)                                                                                   |
| HDMI           | 1                                                                                                                               |
| VGA            | 1                                                                                                                               |
| Network Port   | 1 (10/100/1000 Mbps Ethernet port, RJ-45)                                                                                       |

## General

|                       |                                                                                                               |
|-----------------------|---------------------------------------------------------------------------------------------------------------|
| Power Supply          | 12 VDC, 4 A                                                                                                   |
| Power Consumption     | <12 W (without HDD)                                                                                           |
| Net Weight            | 1.80 kg (3.97 lb)                                                                                             |
| Gross Weight          | 3.00kg (6.61 lb)                                                                                              |
| Product Dimensions    | 375.0 mm × 289.6 mm × 53.0 mm (14.76" × 11.40" × 2.09") (W × D × H)                                           |
| Packaging Dimensions  | 427.0 mm × 137.0 mm × 356.0 mm (16.81" × 5.39" × 14.02") (W × D × H)                                          |
| Operating Temperature | −10 °C to +55 °C (+14 °F to +131 °F)                                                                          |
| Storage Temperature   | −20 °C to +60 °C (−4 °F to +140 °F)                                                                           |
| Operating Humidity    | 10%–90% (RH), non-condensing                                                                                  |
| Installation          | Desktop                                                                                                       |
| Certifications        | CE-LVD: IEC 62368-1:2014<br>CE-EMC: EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1:2019, EN 55032:2015+A11:2020, |

|                |                                                                        |
|----------------|------------------------------------------------------------------------|
| Certifications | EN 55035:2017+A11:2020, EN 55024:2010+A1:2015, EN 50130-4:2011+A1:2014 |
|----------------|------------------------------------------------------------------------|

## Ordering Information

| Type                   | Model            | Description                                                              |
|------------------------|------------------|--------------------------------------------------------------------------|
| DIGITAL VIDEO RECORDER | DH-XVR5216A-I3/T | 16CH Penta-brid 5MP Value/1080P 1U 2HDDs WizSense Digital Video Recorder |
| Accessories (Optional) | DH-NC650         | 802.11AC 650M WIRELESS ADAPTER                                           |
|                        | DH-NC300         | 802.11AX 300M WIRELESS ADAPTER                                           |

## Accessories

Optional:




DH-NC300  
802.11AX 300M  
WIRELESS ADAPTER




DH-NC650  
802.11AC 650M  
WIRELESS ADAPTER

Dimensions (mm[inch])

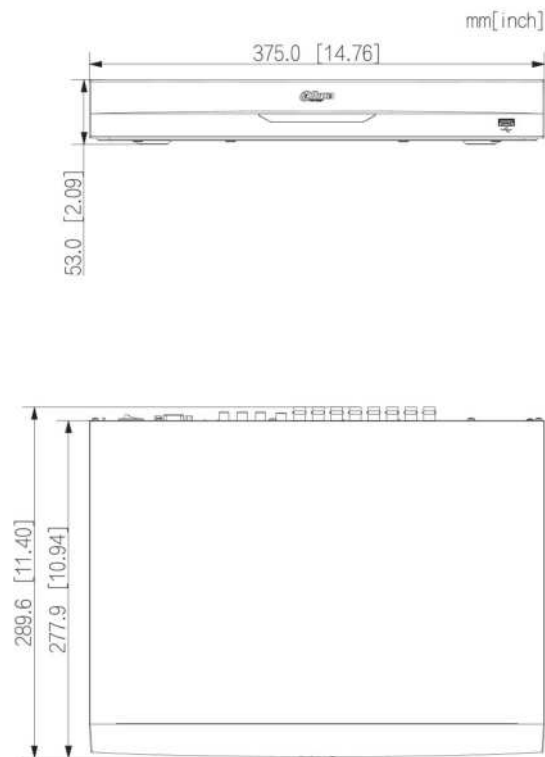

Panels

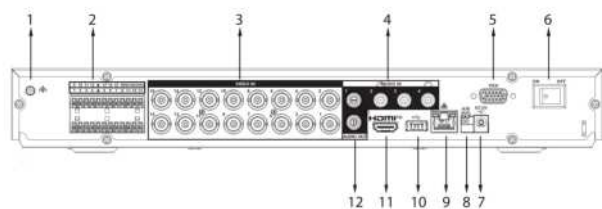

- |                |                             |
|----------------|-----------------------------|
| 1 Ground       | 2 Alarm In/Out              |
| 3 VIDEO IN     | 4 AUDIO IN, RCA Connector   |
| 5 VGA Port     | 6 Power Switch              |
| 7 Power Input  | 8 RS-485 Port               |
| 9 Network Port | 10 USB Port                 |
| 11 HDMI Port   | 12 AUDIO OUT, RCA Connector |